

## Datasheet: com.tom BASIC 3.1

The com.tom BASIC 3.1 is a ready-to-use telecontrol device. The device offers communication interfaces like Ethernet and a serial port. With the preinstalled WEB-PLC editor and the included WEB-PORTAL a turnkey solution for telecontrol is given.



### Technical data

IPC@CHIP®	SC143-LF-IEC Embedded Controller
Ethernet interface	1 x 10/100BaseT, RJ45 connector with traffic and link LED
Serial interface	1x RS232, RS485 or RS422 (selectable) with (one) DSUB9 connector
SD Card interface	MMC/SD memory card
Supply voltage	24 VDC (-15% / +15%) mating connector Weidmüller BL 3.50/3 included in the delivery scope
Active current	max 100mA (at 24VDC)

## Software engineering

Operating System	IPC@CHIP® RTOS
WEB-PLC - Editor and Runtime	<p>Web based Editor, installed on the internal WEB-SERVER</p> <p>PLC function units:</p> <ul style="list-style-type: none"> <li>- Binary – AND, OR, XOR</li> <li>- Bits and bytes – Extract, Pack, Put Pit, Unpack</li> <li>- Messages – Send, Receive</li> <li>- Numerical – Counter, Compare</li> <li>- Special – Enable/disable, OpenVPN</li> <li>- Storage and edge detection – RS Flipflop, Trigger</li> <li>- Timing – TON, TOFF, TP, Timer</li> </ul> <p>IPO cycle time: 25 ms</p> <p>Up to 128 units, I/Os, portal variable I/Os and constants</p> <p>16 com.tom PORTAL variables</p> <p>Up to 786 I/Os</p>
WEB-PLC – Additional functions	<p>Event Log - System events are logged with timestamp and message</p> <p>Simple Network Time Protocol Synchronization of the system clock</p> <p>OpenVPN - To integrate your com.tom device into a virtual private network (activation through com.tom PORTAL)</p> <p>COM Server - According to RFC 2217</p> <p>DHCP Server - Up to 100 clients, up to 10 static leases</p> <p>NAT - To route traffic between a local (internal) and a global (external) network, up to 500 mappings, up to 10 static mappings</p> <p>Firewall – Filters incoming traffic, up to 500 rules (incl. dynamic rules for outgoing traffic)</p> <p>Update - Over com.tom PORTAL, local WEB page or SD card</p> <p>CODESYS network variables – Up to 32 lists and 256 values</p> <p>Export – Export the diagram and/or the settings of your com.tom device as an update package</p> <p>IEC 60870-5-104 Server (optional) – Up to 512 values</p> <p>Modbus - RTU master and TCP client, up to 32 devices and 128 values</p>



com.tom PORTAL communication	Predefined and installed: <ul style="list-style-type: none"> <li>- device information</li> <li>- 8 alarms</li> <li>- update</li> <li>- Open VPN activation and status</li> <li>- 16 com.tom PORTAL variables</li> <li>- Modbus I/Os</li> <li>- IEC 60870-5-104 server I/Os</li> <li>- CODESYS network variable I/Os</li> </ul>
------------------------------	--

### Environmental

Operating temperature (TA)	0°C to +55°C (-20 °C to 60 °C upon request)
----------------------------	---

### Mechanical data

Size (W x L x H)	46 x 103 x 63 mm
Material	steel aluminum zinc, DIN 10215
Mounting	DIN rail mounting

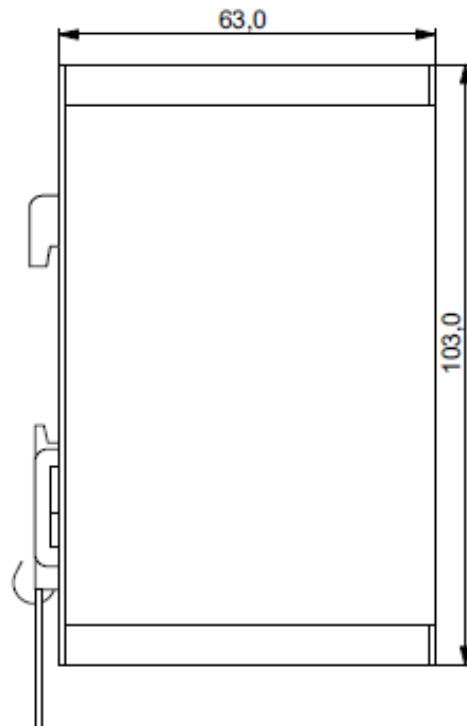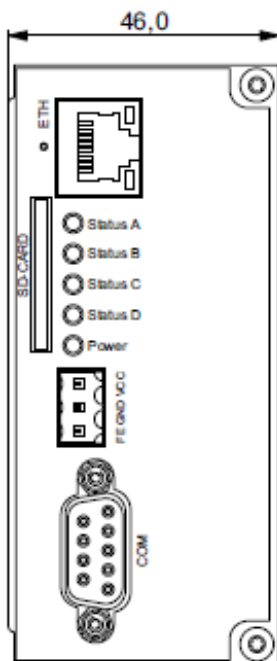

**Compliance and Conformity**

EMC emission	IEC 61000-6-4
EMC immunity	IEC 61000-6-2
Protection Rating	IEC 60529: IP20
Electrical Shock	IEC 61140: Class III
Low Voltage Directive	EN 60950-1
R&TTE Directive	EN 301 489-1/-7, EN 301 511
RoHS/WEEE	

**Ordering information**

Order-No.:	570579
------------	--------