

Datasheet: com.tom BASIC 5.2 S

The com.tom BASIC 5.2S is a programmable telecontrol device. The device offers communication interfaces like Ethernet and a serial port. Furthermore four digital inputs and four digital outputs are present. The CODESYS SP@CHIP runtime kernel is installed as well as the WEB-PORTAL communication software. With the integrated switch and the auxiliary com.tom-functions, a compact and cheap VPN and NAT access to controls and devices in the local network structure is given.



Technical data

IPC@CHIP®	SC143-LF-IEC Embedded Controller
Ethernet interface	1+4 x 10/100BaseT, RJ45 connectors with traffic and link LED
Serial interface	1x RS232, RS485 or RS422 (selectable) with (one) DSUB9 connector
SD Card interface	MMC/SD memory card
Digital Inputs	4 x sink, 24 V DC typ 5 mA nominal value for TRUE: 15 V DC min nominal value for FALSE: 5 V DC max no potential isolation
Digital Outputs	4 x Transistor (high-side) 24 V DC, max 500 mA short-circuit and overload resistant, no potential isolation, mating connector Weidmüller BL 3.50/10 included in the delivery scope
Supply voltage	24 VDC (-15% / +15%) mating connector Weidmüller BL 3.50/3 included in the delivery scope
Active current	max 100mA (at 24VDC) + current digital outputs

Software engineering


Operating System	IPC@CHIP® RTOS
PLC - Runtime	CODESYS SP@CHIP - CODESYS SP V2.3 runtime kernel
Application software	Freely programmable in IEC 61131-3 with CODESYS V2.3 Programming System
Additional functions	Event Log – System events are logged with timestamp and message Simple Network Time Protocol Synchronization of the system clock OpenVPN – To integrate your com.tom device into a virtual private network Activation over com.tom PORTAL Modbus – RTU and TCP, up to 8 devices and 64 values DHCP Server – Up to 100 clients, up to 10 static leases NAT – To route traffic between a local (internal) and a global (external) network Update – Over com.tom PORTAL or local WEB page CODESYS IO configuration export Import into your CODESYS project to the global variable list. IEC 60870-5-104 Server –optionally available.

Environmental

Operating temperature (TA)	0°C to +55°C (-20 °C to 60 °C upon request)
----------------------------	---

Mechanical data

Size (W x L x H)	65 x 103 x 63 mm
Material	Continuously hot-dip aluminium-zinc coated steel sheet (DIN EN 10215)
Mounting	DIN rail mounting

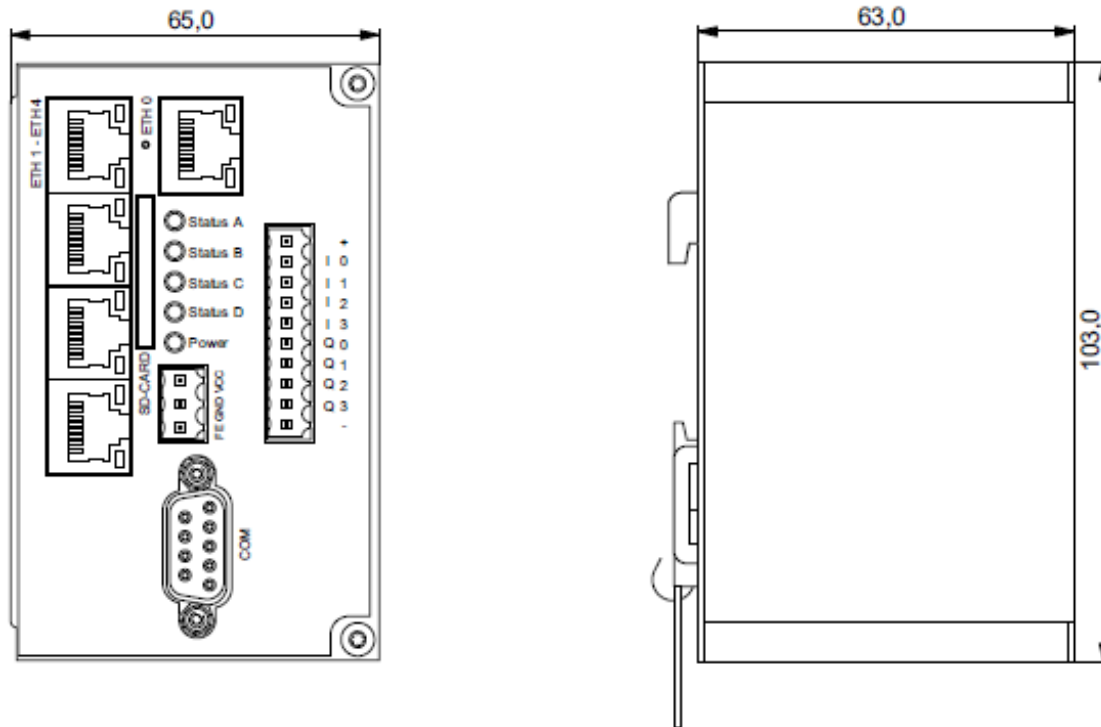

Compliance and Conformity

CE, RoHS/WEEE	
- EMC emission	IEC 61000-6-4
- EMC immunity	IEC 61000-6-2
- Protection Rating	IEC 60529: IP20
- Electrical Shock	IEC 61140: Class III
- Low Voltage Directive	IEC 60950-1

Ordering information

Order-No. com.tom BASIC 5.2 S:	570888
Accessory IEC 60870-5-104 Server:	570796